


Display Settings

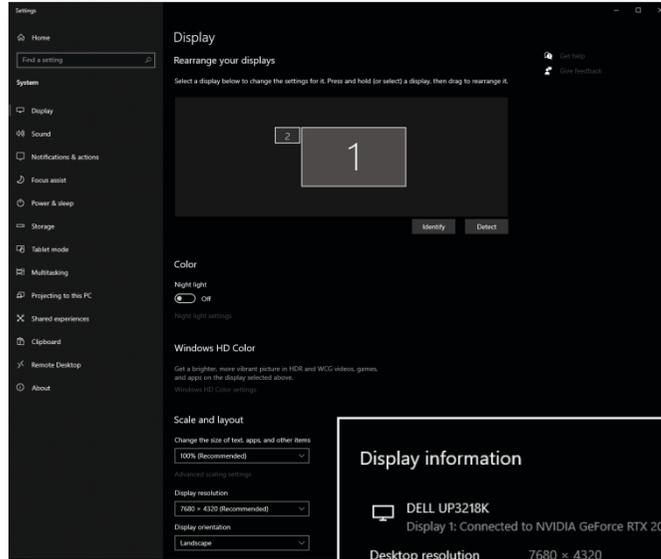

If you are using a secondary monitor (recommended)

- Make that monitor your main display
- Verify that your displays are extended
- Set your Looking Glass resolution settings to 7680px x 4320px and ensure that it is scaled at 100%

With the 8K display selected, select "Advanced display settings" and ensure that "Refresh rate (Hz)" is 60Hz. If it shows 30Hz, check that both DisplayPort cables are securely connected.

Final Step

To activate your Looking Glass, head here:

LOOK.GLASS/START8K

We're excited for you to start capturing, viewing, sharing, and developing holographic content for your Looking Glass.

If you have any questions at all, write in to us at support@lookingglassfactory.com

To the Future!

Looking Glass 8K Immersive Display

Hardware Setup Guide




What's in the Box

- 1 x Looking Glass 8K Display
- 1 x Base Plate
- 2 x DisplayPort Cable
- 1 x USB 3.0 Cable
- 1 x Power Cable
- 1 x Microfiber Cloth
- 1 x Leap Motion Controller
- 2 x Leap Motion Controller Cables

Cleaning Note

Please clean your Looking Glass only with the included microfiber cloth. Do not clean with other cleaning agents or rubbing alcohol as this will damage the front surface of the display.

Buttons

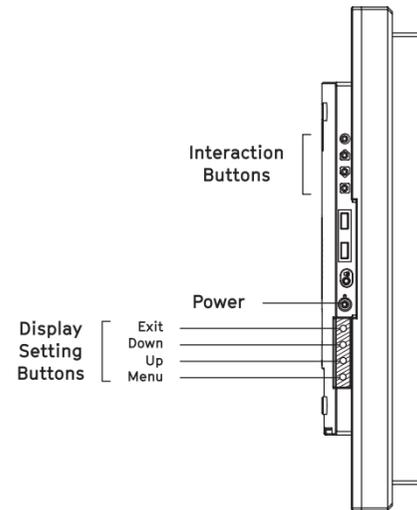


There are two sets of buttons on the side of your Looking Glass 8K. The upper set maps to interaction controls for use with your Looking Glass and the lower set maps to the display control panel of your Looking Glass 8K.

If you are setting up the 8K display with your own computer:


For best performance, ensure that your PC meets the following minimum recommended requirements:

- i7 CPU
- 16GB ram
- RTX 2080 Ti GPU
- 256 GB SSD

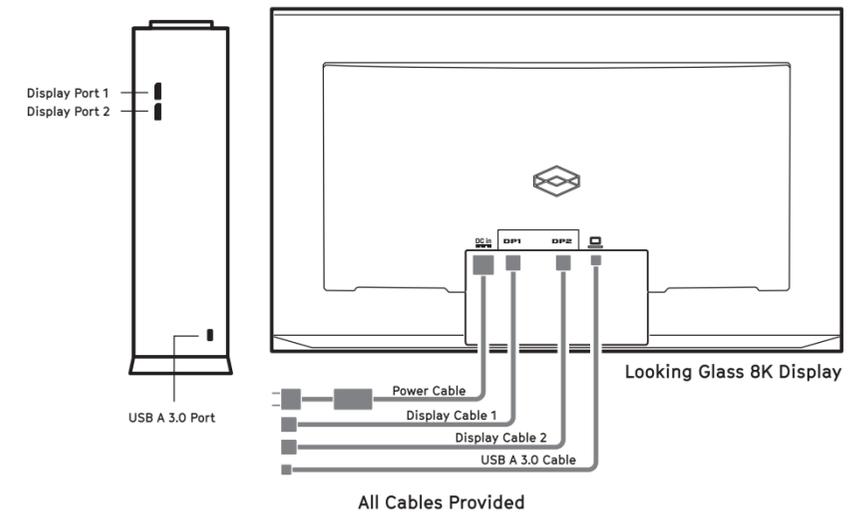


Connect the power cable. Connect the DisplayPort cables and USB cable to your host PC. DisplayPort cables should connect to external graphics card ports and not motherboard ports. If the PC is also connected to a 2D monitor (suggested), connect the monitor to the graphics card as well for best performance.

Attaching the Baseplate

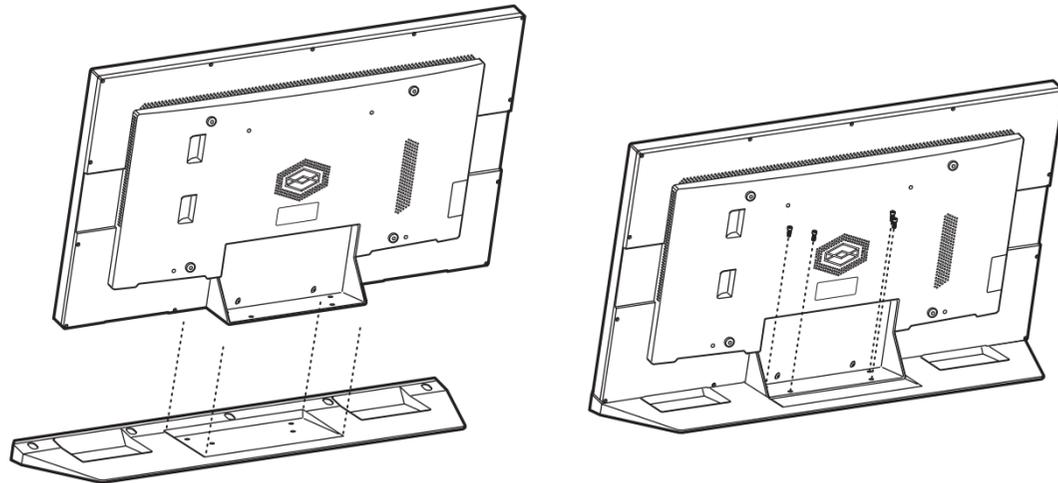

1. Slide the display into the baseplate. **WARNING!** The display is heavy (28kg) and requires at least 2 people to lift and operate.
2. Using the provided 4mm hex key and the four (4) M6 x 10 SHCS screws, secure the display to the baseplate.

If you are setting up the 8K display with the included Computer Bundle:

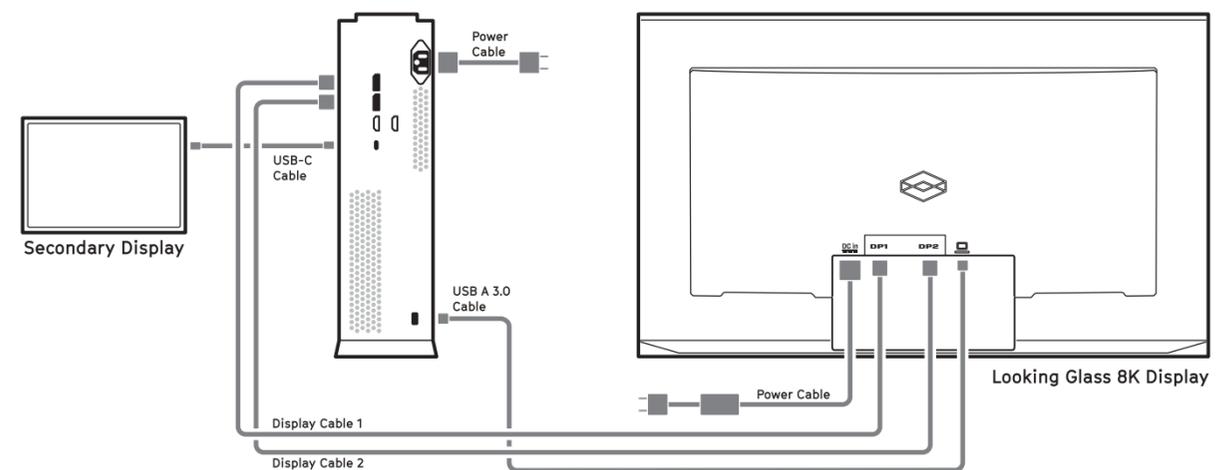

Connect the power cable. Connect the DisplayPort cables and USB cable to the host PC. Use the provided USB-C cable to connect your secondary display to the computer.